



### Basic Set-up

#### 1 Connect the AC power

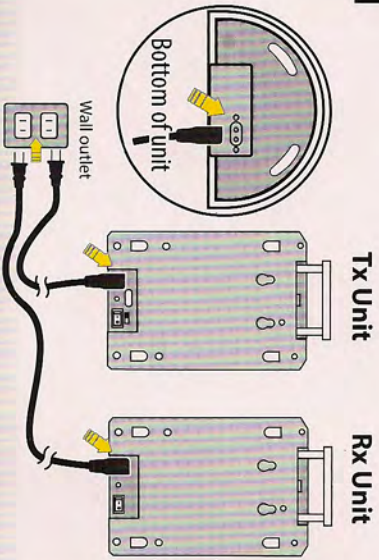


- Connect supplied AC cables to Tx unit and Rx unit.
- Plug cords into wall outlets.
- Charge batteries about 10 hours before you start using units for the first time.

#### 2 Charge built-in Li-Ion batteries on both Tx unit and Rx unit



- By connecting AC power, batteries will be charged and Red LED will turn on.
- ✓ Red LED indicator means that unit is plugged in and charging.
- ✓ Red LED indicator will turn off when unit is fully charged.
- ✓ If Red LED indicator is flashing, this means that battery levels are low and need charging.
- Charge batteries about 10 hours before you start using units for the first time.

#### 3 Power-On

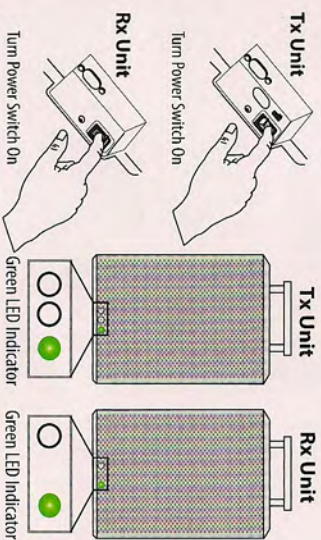


- Turn power switch to "ON" position, you will hear "power on".
- Power switches are located on the bottom of Tx and Rx units.
- Power Green LED Indicator will turn On.

### Bluetooth® Connection


#### 4 enabled Bluetooth pairing with NFC

- Turn on Bluetooth function on you Bluetooth device.
- Place your Bluetooth device on the silkscreen "NFC" on the top surface of Tx unit.
- Pairing will be completed automatically, and Bluetooth Blue LED indicator on Tx unit will be ON.
- Once paired, you can play audio from your Bluetooth device and audio can be heard from this Tx unit.


**Note:** If pairing won't be completed automatically, your Bluetooth device may not be NFC enabled. Go to STEP 5 so that you can manually complete pairing.

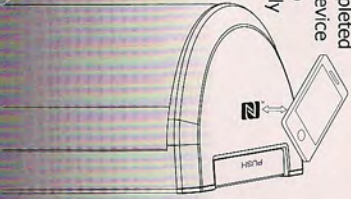

#### 5 Manual Bluetooth pairing

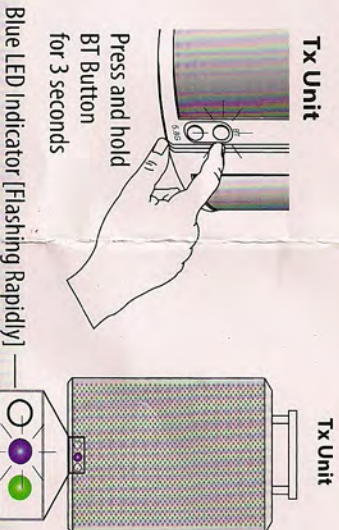

- Set your Bluetooth device to search for Bluetooth devices. You will recognize Tx unit by its Bluetooth name "BTW248XBK".
- Once selected, your Bluetooth device will indicate as "Connected", and you will hear the word "Pairing Completed".
- BT Blue LED turns on upon completion of pairing.

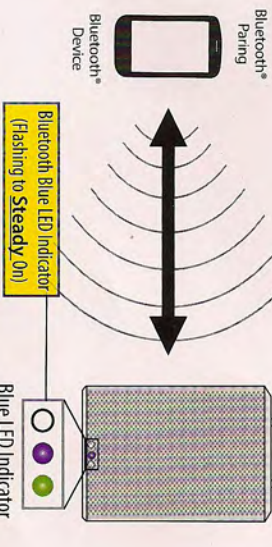

- Place Tx unit and your Bluetooth device so they are no more than 3 feet apart.
- Press and hold "BT" button on Tx unit for 3 second to enter into Bluetooth pairing mode. BT Blue LED will flash rapidly.
- Make sure Bluetooth function of your Bluetooth device is ON.

## BTW248XBK INSTRUCTIONS FOR ATTACHING SPEAKERS (Tx & Rx)

The Tx & Rx units can be coupled together to be carried as one stereo unit and allow you to experience 360-degree sound. Please follow these instructions to properly do so.

### Step 1

There are 4 slotted openings and 4 hooks which are provided on the rear of the Tx & Rx units respectively.

Insert the 4 hooks on the Rx unit into the 4 slotted openings on the Tx unit as shown in the Fig.1.

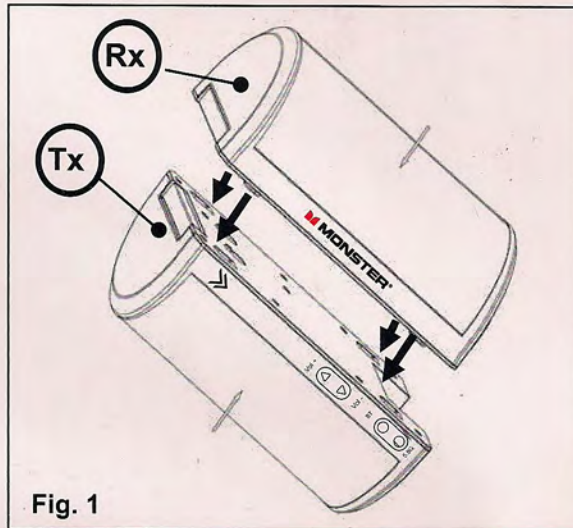


Fig. 1

### Step 2

Make sure all hooks are completely inserted in to the openings.

Slide the Rx unit down so that the hooks will catch the bottom edge of the openings. Please follow the directional arrows indicated in the Fig.2.

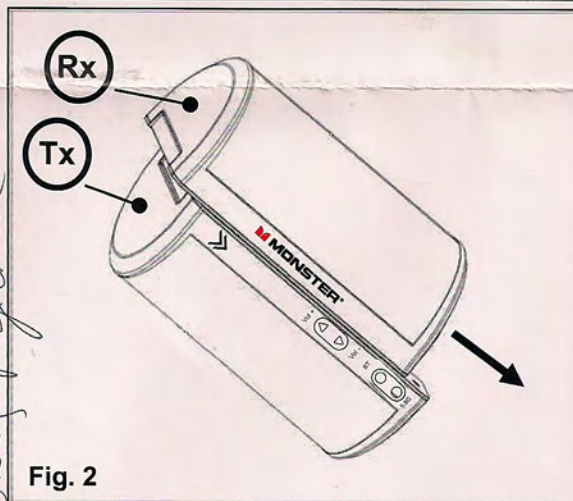


Fig. 2

### Step 3

Make sure that the Rx unit is completely flush where the top & bottom surfaces of both units become even and flat.

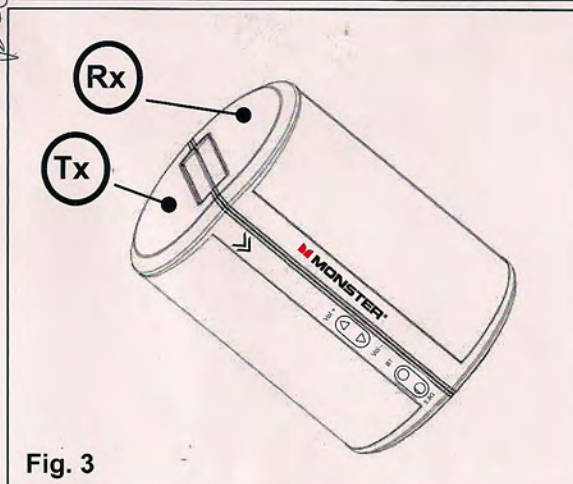


Fig. 3

### SEPARATING SPEAKER UNITS

Carefully apply pressure in directions as indicated on the arrows on the side of the speaker units until the speakers release from the slots.

*Miguel  
Dorsey P. y  
M. A.*